



CURVA DE PERFORMANCE

60Hz

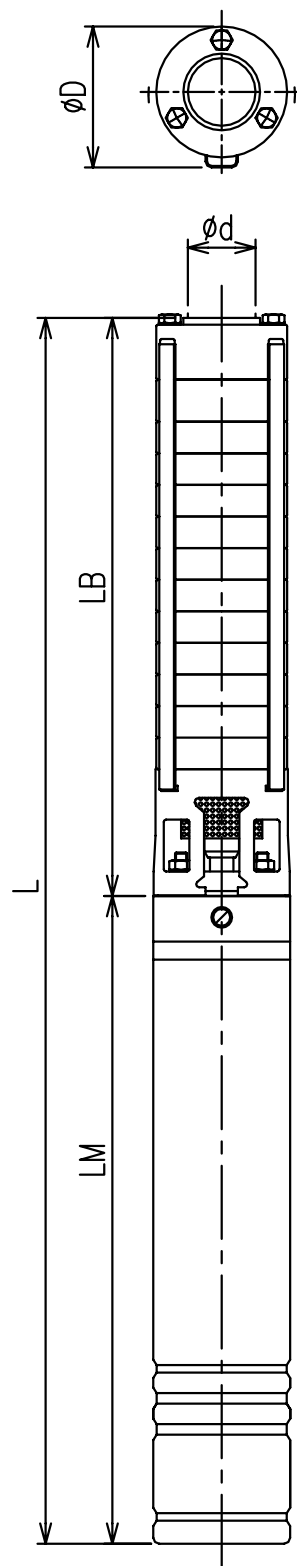

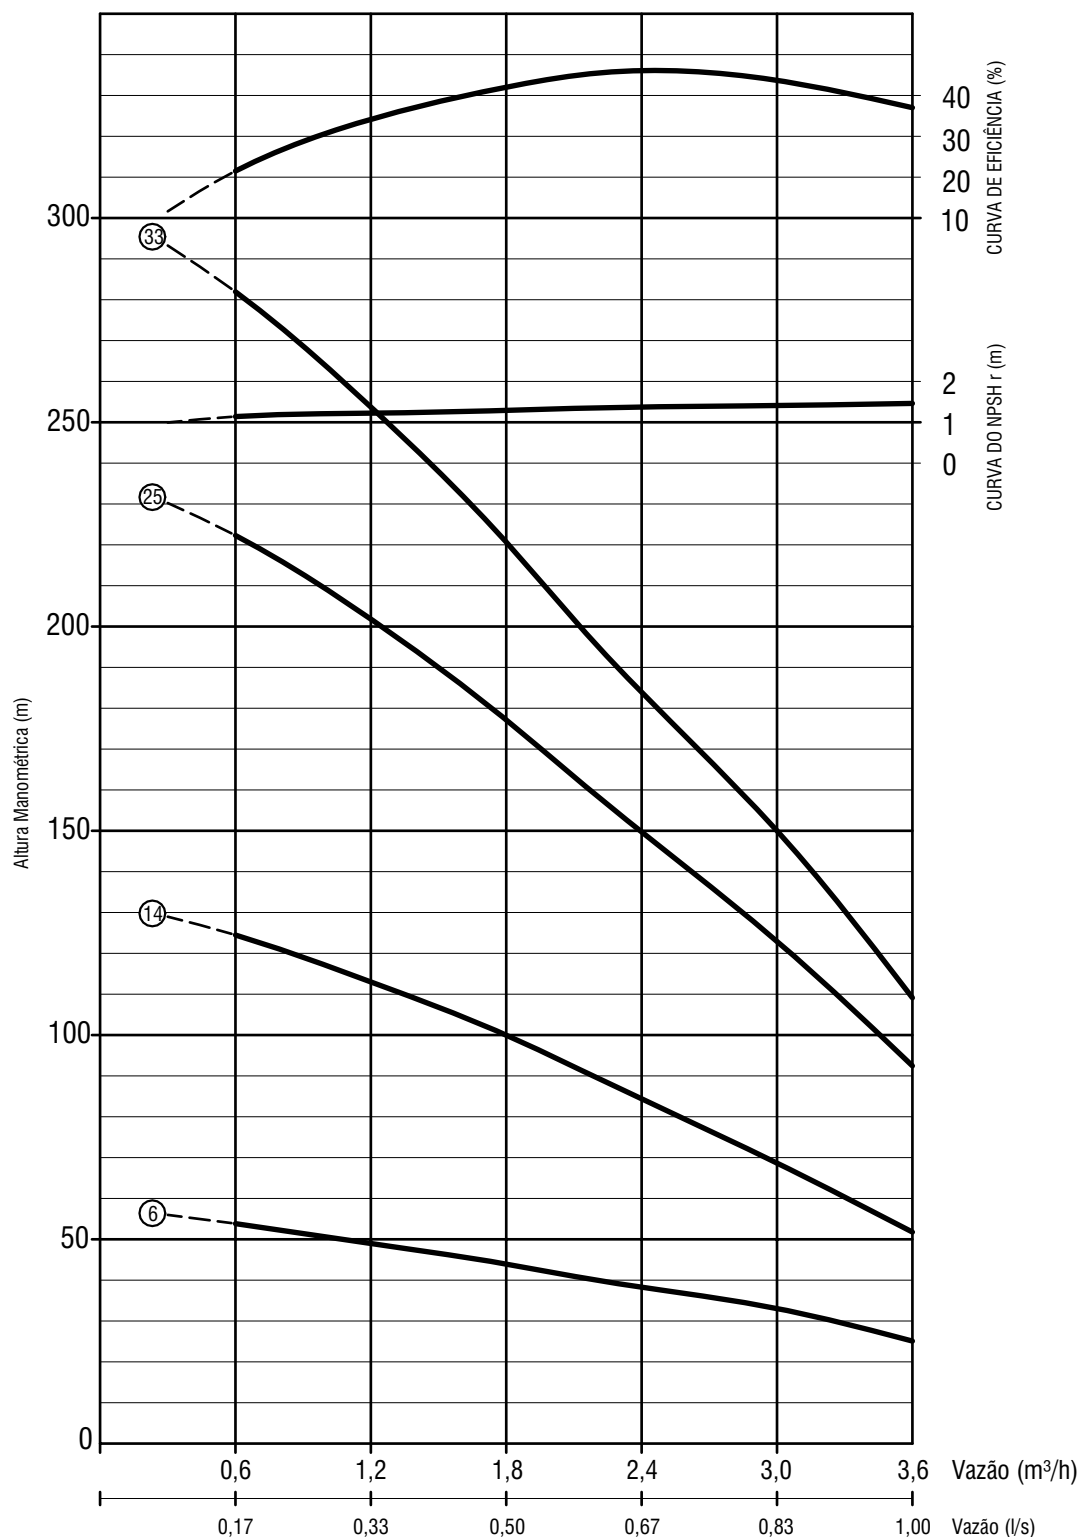

MOTOBOMBAS SUBMERSAS
PARA POÇOS DE MÍN. 4”

MODELO
BHS 42S

TABELA PARA SELEÇÃO DE EQUIPAMENTOS

BOMBA MODELO	Nº EST.	MOTOR MODELO	POTÊNCIA		VAZÃO E ALTURA MANOMÉTRICA								LB	TRIF			TRIF			TRIF			MONO			MONO			D (mm)	Ø POL BSP			
			HP	kW	0,0	0,6	1,2	1,8	2,4	3,0	3,6	m³/h		220V			380V			440V			254V			440V							
														LM	L	kg	LM	L	kg	LM	L	kg	LM	L	kg	LM	L	kg			LM	L	kg
42S-06	06	OM4A	0,75	0,56								280	458	738	11,8	458	738	11,8	-	-	-	385	665	11,1	385	665	11,1	-	-		98	1 1/4"	
		OM4A 2F	0,75	0,56	57,9	53,8	49,0	44,0	40,1	33,1	25,1	m	280	-	-	-	-	-	-	-	-	-	433	713	11,4	-	-	-	-	-			
		M4P2	1,00	0,75								280	428	708	17,0	468	748	19,0	468	748	19,0	468	748	19,0	468	748	19,0	508	788	19,0			
42S-14	14	OM4A	1,50	1,12								410	493	903	14,9	493	903	14,9	-	-	-	445	855	15,7	445	855	15,7	-	-	-	98	1 1/4"	
		OM4A 2F	1,50	1,12	132,9	124,5	113,0	101,6	88,7	72,6	51,8	m	410	-	-	-	-	-	-	-	-	-	503	913	15,9	-	-	-	-	-			
		M4P2	2,00	1,49								410	508	918	22,3	508	918	24,9	563	973	24,9	563	973	24,9	563	973	24,9	563	973	24,9			
42S-25	25	OM4A	3,00	2,24								630	503	1133	20,2	503	1133	20,2	-	-	-	490	1120	22,6	490	1120	22,6	-	-	-	98	1 1/4"	
		M4P7	4,00	2,98	237,3	222,3	201,8	181,4	158,4	129,6	92,5	m	630	700	1330	33,5	700	1330	33,5	700	1330	33,5	700	1330	33,5	700	1330	33,5	780	1410			36,5
		OM4A	4,00	2,98								850	620	1470	26,3	620	1470	26,3	-	-	-	-	-	-	-	-	-	-	-	-			-
42S-33	33	M4P7	4,00	2,98	303,6	281,9	253,7	227,2	196,5	156,2	109,1	m	850	700	1550	36,0	700	1550	36,0	700	1550	36,0	700	1550	36,0	700	1550	36,0	780	1630	39,0		